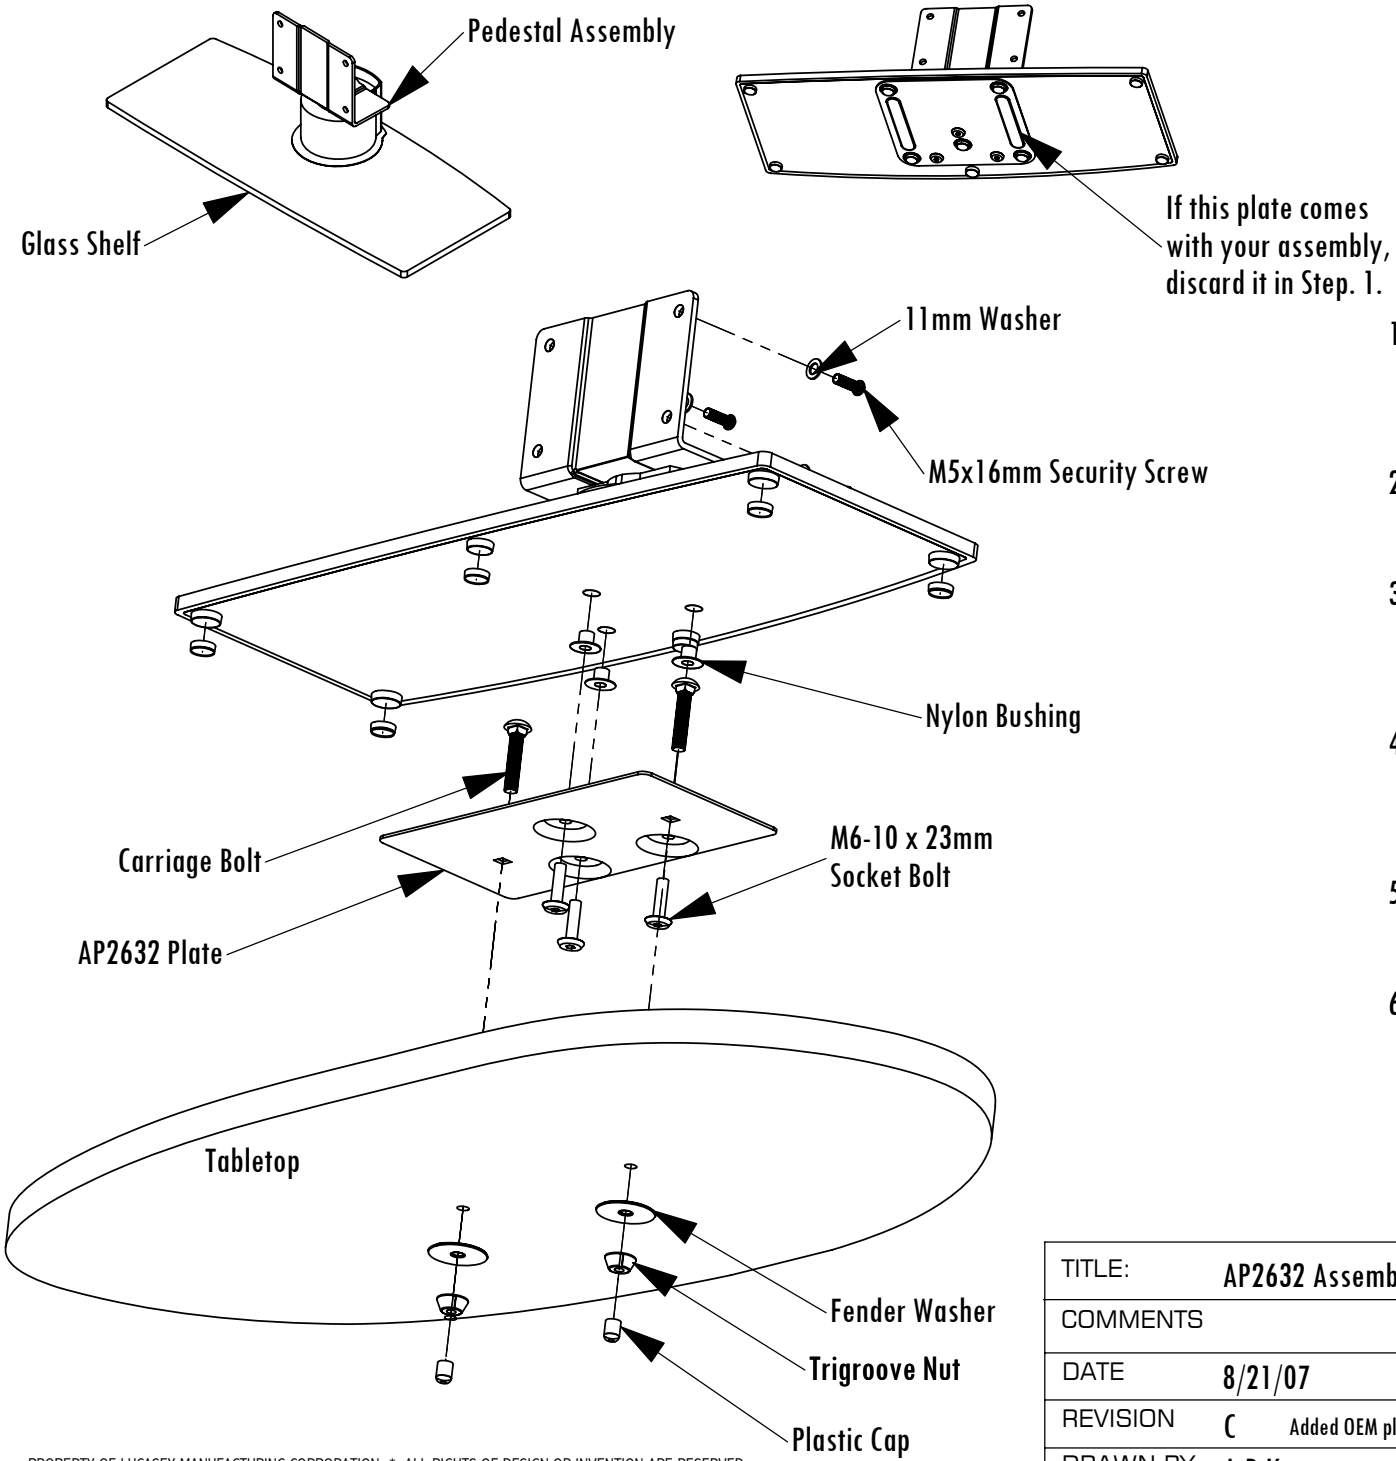

Before mounting the adapter plate to the glass shelf with pedestal:

a. Do not attach the flat screen.
b. Using the square holes in the plate as a template, drill 1/4" holes through the furniture top.

1. Remove the M6 socket bolts from the bottom of the glass shelf.
   Note: this releases the pedestal from the shelf.

2. If the nylon bushings pulled free, place them back into the glass plate.

3. Insert the two carriage bolts through the square holes in the AP2632 plate. The dimples must face up.

4. Place the AP2632 plate against the bottom of the glass shelf and screw the M6 socketbolts through the shelf and into the pedestal.

5. Stick the six (6) nylon feet on the original pads on the bottom of the glass shelf.

6. Place the assembly on the mounting surface with the carriage bolts in the pre-drilled holes. Secure the carriage bolts to the table with a fender washer andtrigroove nut. Cover the end of the bolt with a plastic cap.

TITLE:	AP2632 Assembly Instructions	
COMMENTS		FILE NAME AP2632_INSrevC
DATE	8/21/07	LUCASEY® MOUNTING SYSTEMS
REVISION	C Added OEM plate	
DRAWN BY	A.B.K.	

PROPERTY OF LUCASEY MANUFACTURING CORPORATION * ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED